


WUTUNG
MACHINE



WT-430

WT-3025

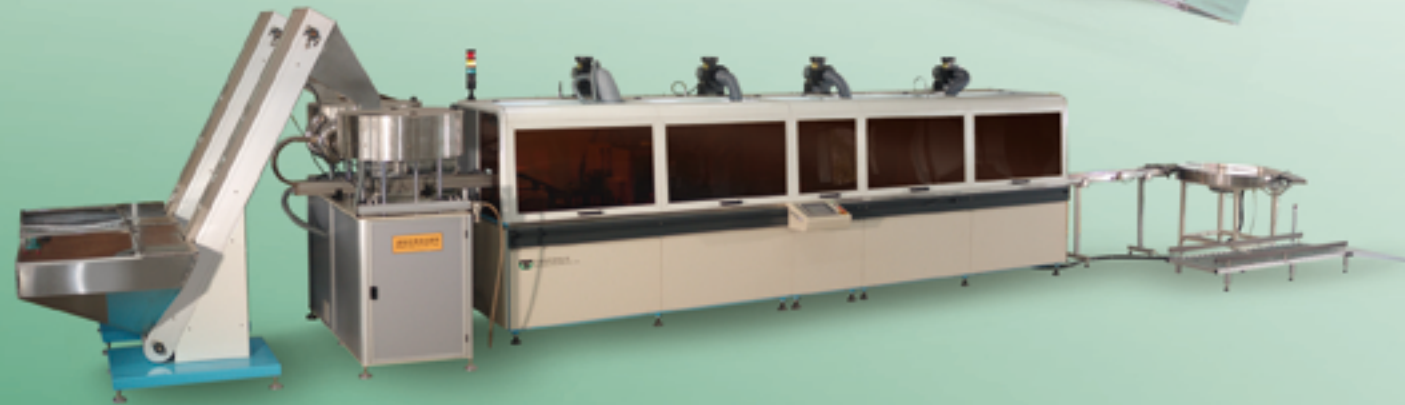

WT-216



 **WUTUNG HOLDING CO., LTD.**
互通集團有限公司

香港

香港葵涌梨木道58-64號萬美達工業大廈地下B座
Flat B,G/F., Amiata Ind. Bldg.,No.58-64 Lei Muk Rd., Kwai Chung, Hong Kong.
Tel:+852 24269761 24239199 Fax:+852 24890968 24803808

南沙

廣東省廣州市南沙區東涌鎮魚窩頭細瀝村互通工業城(南沙大道旁)
Wutung Ind. City,Yu Wo Tou, DongChong Town, Nansha, GuangZhou City, GuangDong Province, P.R.China
Postcode:511475
Tel:+86 20 84911886 Fax:+86 20 84911004

長安

廣東省東莞市長安鎮振安東路業盛廣場一號樓115-1118號商舖
No.115-118, Building No 1, Yesheng Square, Zhenan East Road, Changan Twon, Donggan City, Guangdong province
Postcode:523850
Tel:+86 769 85531450 Fax:+86 769 85319281

上海

上海市青浦區華青南路481-485號千岱大廈1107室
1107 Room, QianDai Building, No.481-485, HuaQing South Road, QingPu District, Shanghai Ctiy.
Postcode:201700
Tel:+86 21 59867608 Fax:+86 21 59867609

www.wutung.com,hk

 **PRINT
MASTER**
CLOSURE PRINTING
AUTOMATIC OFFSET PRINTING SERIES



AUTOMATIC

MORE THAN JUST PRINTING...

CLOSURE PRINTING SERIES

全自動膠印系列



more than just printing...

性能一覽:

Function Overview:

配備自動瓶蓋提升器，可儲存大量瓶蓋，自動控制一定數量之瓶蓋進入正反理料器內，保持理料器內的瓶蓋數量。
自動入料裝置由鋁合金及不銹鋼組成輸送管道，由風力推動瓶蓋前進，裝有監察器監察瓶蓋情況，如滿料則停止供料，在缺料時則開始入料。
配備雙火焰處理器，視乎須要可獨立開關。表面處理用於改變物料之黏貼度和附著力，使油墨容易附上物料表面。採用全新設計的磁性粘版印刷頭，分二組印刷頭，每組分二個顏色，既可套色又可以疊色的印刷方式。並加以上下左右套色微調裝置。
每組印刷頭可獨立調校，特別設計的油盤，裝拆方便、清潔簡便，既減低油墨損耗又可提高生產效率。使用名廠Fusion UV 燈管，自動溫度控制及抽風系統，防止燈管過熱，發揮燈管最高性能。
採用日本高解像度推拉式觸摸屏，方便機組技術人員調試工作。
全自動出料、自動計數、自動裝箱及換箱功能，無需人工裝箱計數，節省資源。
採用靜電除塵器清除取附印刷瓶蓋表面的灰塵顆粒。
採用先進網紋輥上光油系統，使被印產品的圖案表面更具光澤度。

Equipped with automatic escalators, it can store a large volume of caps and feed the correct number of caps into the unscrambler. Maintain a sustainable number of caps in the unscrambler.
Automatic feeding system is composed of aluminum and stainless steel, monitoring the conditions of feeding tracks with sensors. It will stop feeding when it is full, or vice-versa.
Flame treatment is a standard option. Aim to increase the adheres ion of the ink by this surface treatment.
Two sets of two-color offset printing head equipped with magnetic print roller, it can achieve color on color printing. Each print head can be individually micro-adjusted various directions.
The special designed ink tray is simple and convenient for installation, disassembly and cleaning, also reduce ink loss in order to improve production efficiency.
Using the original Fusion UV Lamp, it has automatic temperature control and extraction system. It can avoid the lamp over-heated and maximized the lamp efficiency.
User-friendly touch screen display fully control the machine around the entire working area.
Automatic unload the finished caps, with counting and displacing carton system, achieve fully automatic production to improve production efficiency.
Remove any dust on the caps surfaces with static bars before printing, to ensure quality printing effect.
With advanced anilox roller, the varnishing unit makes the cap surface having higher shining effect.

WT-3025 : SPECIFICATIONS / 規格

被印件尺寸(直徑X長度) / Printing Product Size (Dia.x Length)	Ø28mm-Ø38mm
最大印刷面積 / Maximum Printing Area	Ø34mm
最高運行速度 / Maximum Running Speed	1500pcs/min
UV燈功率 / UV Lamp Power	3kW/4kW each
電力要求 / Power Requirement	380V 3phase 50Hz , 220V 時
氣壓要求 / Compressed Air Pressure Requirement	5-7 bar
總功率 / Power Consumption	18kW
機械體積(長x寬x高) / Machine Dimension (L x W x H)	6400mm x 1500mm x 1700mm
重量 / Weight	6000Kg
可印刷顏色數量 Number of Color	1-4Color +Lacquer
UV系統數量 Number UV System	3
生產線面積(長x寬x高) / Production Line Dimension (L x W x H)	13100mm x 4000mm x 3100mm

WT-216 : SPECIFICATIONS / 規格

被印件尺寸(直徑X長度) / Printing Product Size (Dia.x Length)	Ø28mm-Ø38mm
最大印刷面積 / Maximum Printing Area	Ø34mm
最高運行速度 / Maximum Running Speed	1000pcs/min
UV燈功率 / UV Lamp Power	3kW each
電力要求 / Power Requirement	380V 3phase 50Hz
氣壓要求 / Compressed Air Pressure Requirement	5-7 bar
總功率 / Power Consumption	8kW
機械體積(長x寬x高) / Machine Dimension (L x W x H)	2500mm x 950mm x 1500mm
重量 / Weight	1950Kg
可印刷顏色數量 Number of Color	1-2Color
UV系統數量 Number UV System	1
生產線面積(長x寬x高) / Production Line Dimension (L x W x H)	7200mm x 1400mm x 2200mm

WT-430 : SPECIFICATIONS / 規格

被印件尺寸(直徑X長度) / Printing Product Size (Dia.x Length)	Ø28mm-Ø32mm
最大印刷面積 / Maximum Printing Area	Ø28mm
最高運行速度 / Maximum Running Speed	3000pcs/min
UV燈功率 / UV Lamp Power	5kW each
電力要求 / Power Requirement	380V 3phase 50Hz
氣壓要求 / Compressed Air Pressure Requirement	5-7 bar
總功率 / Power Consumption	21kW
機械體積(長x寬x高) / Machine Dimension (L x W x H)	5150mm x 1500mm x 1660mm
重量 / Weight	7500kg
可印刷顏色數量 Number of Color	1-4Color +Lacquer
UV系統數量 Number UV System	3
生產線面積(長x寬x高) / Production Line Dimension (L x W x H)	13100mm x 4000mm x 3100mm
煤氣流量 / Gas Flow	1-10L/min
燒火空氣流量 / Air Traffic Light a Fire	14-140L/min

專門針對圓形塑料瓶蓋的印刷生產線，為照顧到客戶追求高速幼細的特殊印刷，制版方便、降低印刷成本及操作簡單而設。以一印一乾的設計原則，獨家創新採用磁性滾，由單色到四色加光油組合而成，既可套色又可疊色。採用日本彩色觸摸屏及PLC控制系統，配合不同配套設備組成一條高速的生產線。並採用靜墊式滾印設計，克服瓶蓋高低誤差所帶來的印刷困難。

It is specially designed for customers who need bottle cap printing with high-speed, easy plate making, lower cost and simple operation. Machine design is based on the principle of dry after each print, equipped with unique magnetic rollers, two sets of dual-color offset printing units and one set of vanishing unit, it can achieve color on color printing with accurate registration. Control by PLC with color touch screen interface, it organizes a high efficiency production line .